


260/915 MHz Diplexer

◆ Features:

- SMA Connectors
- 1.5:1 VSWR from 20 MHz to 1200MHz

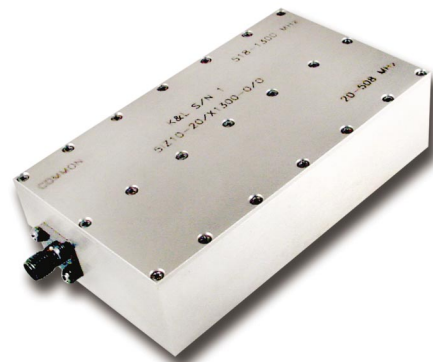

◆ Specifications:

Crossover Loss: 50 dB from 508 MHz to 518 MHz


Insertion Loss:
1.5 dB 20 MHz to 500 MHz
1.5 dB 530 MHz to 1300 MHz

Stopbands:
40 dB 20 MHz to 450 MHz
40 dB 560 MHz to 1200 MHz


VSWR: 1.5:1 from 20 MHz to 1200 MHz

Dimensions: 3.58" x 2" x 1" Package

Connectors: SMA

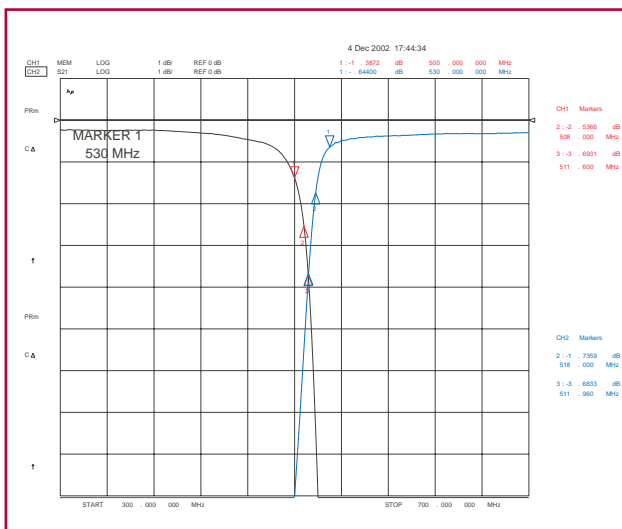

Crossover

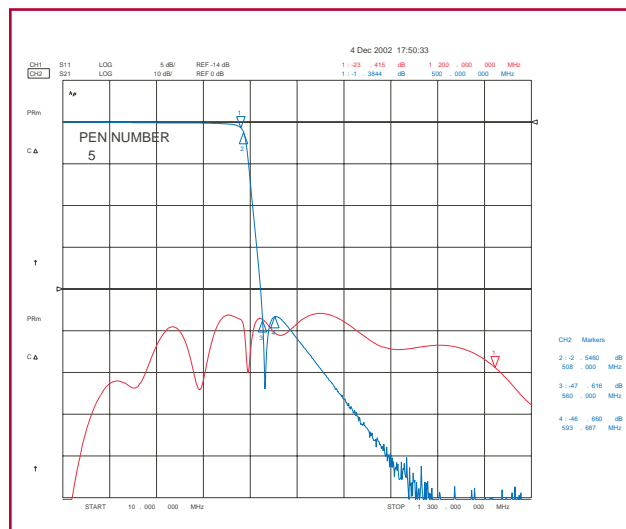

Amplitude Response Channel 1

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE


Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com




A DOVER COMPANY

260/915 MHz Diplexer

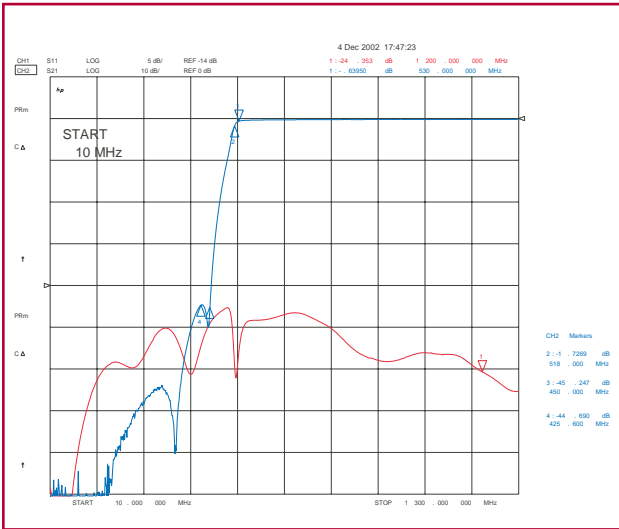

Amplitude Response Channel 2

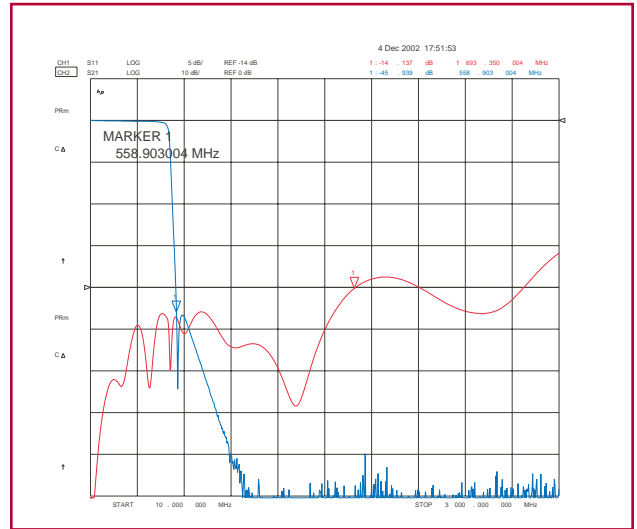

Ultimate Response

Filtering Solutions for Your Global Market

USA
Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE
Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

