


4LM10-40/XQ88-N/N — High Power VHF Triplexer


◆ Features:

- 400 W CW Power Simultaneously through all Three Channels into a 2.0:1 Load
- Low Insertion Loss
- Meets Military Shock/Vibration Requirements

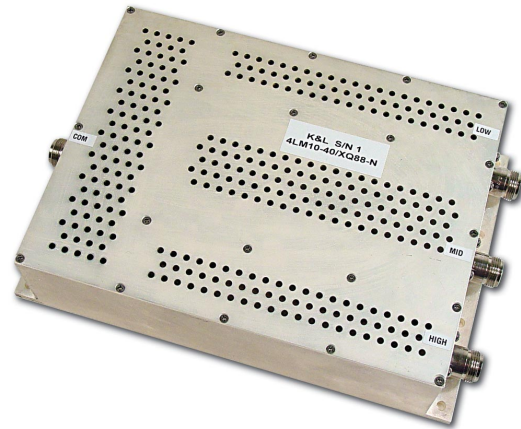

◆ Specifications:

Insertion Loss:		Maximum Power Rating:	400 W CW per channel (1200 W maximum combined power) into a 2.0:1 Load
Channel 1: 40 - 50 MHz	0.5 dB Max	Operating Temperature:	-10 to +55 °C
Channel 2: 60 - 70 MHz	0.5 dB Max	Dimensions:	9.0 x 6.0 x 2.20"
Channel 3: 80 - 88 MHz	0.5 dB Max	Connectors:	N Female all ports
VSWR:			
All Channels:	1.5:1 Max		
Channel to Channel Isolation:	20 dB Minimum		

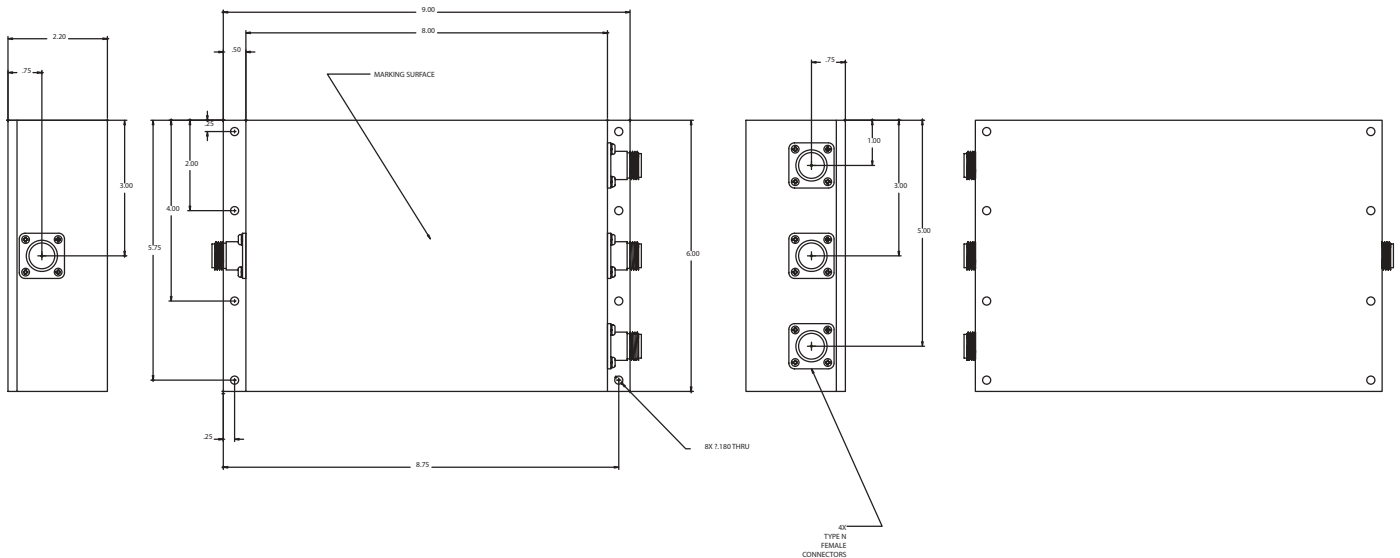


Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 443-260-2268
 Email: sales@klmicrowave.com


EUROPE
 Phone: +44-(0)-1904-567355
 FAX: +44-(0)-1904-675521
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com


4LM10-40/XQ88-N/N — High Power VHF Triplexer

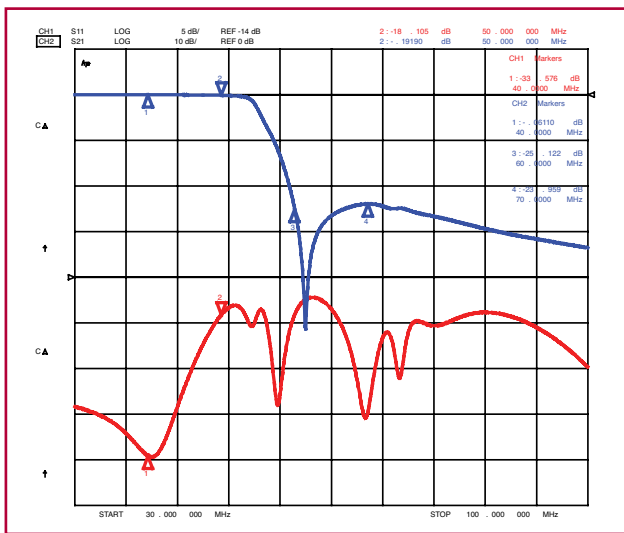

Channel 1

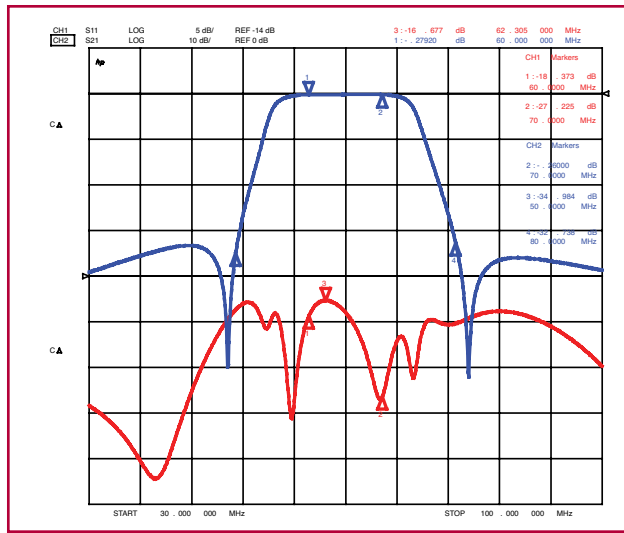

Channel 2

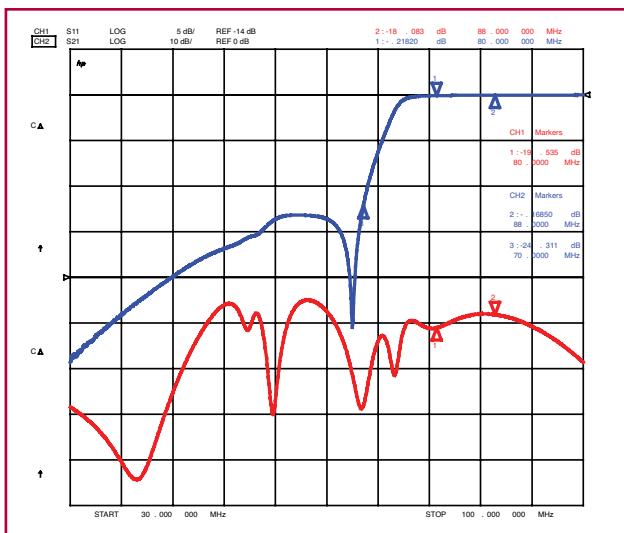

Channel 3



Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 443-260-2268
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1904-567355
 FAX: +44-(0)-1904-675521
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com