

11SH10-1000/T6000-O/O 1 GHz Highpass Filter

◆ Features:

- Suspended Substrate & Chip/Wire Technology
- Plated Thru Hole Board
- SMA Connectors




◆ Specifications:


| | | | |
|----------------------------|------------------------|----------------------|-------------------------|
| 3 dB cutoff: | @ 1.0 GHz | Stopbands >30 dB: | @ DC - .75 GHz |
| Insertion Loss <1.0 dB: | @ 1.1 GHz - 6.0 GHz | Shock: | 20 G's, 1/2 Sine, 11Ms |
| VSWR 2.0:1: | @ 1.1 GHz - 6.0 GHz | Vibration: | 10 G's, 10 Hz - 2000 Hz |
| | | Temperature: | -55° C to 85° C |
| | | Rel. Humidity: | 0 - 95% |

◆ Applications:

- Aeronautical Navigation

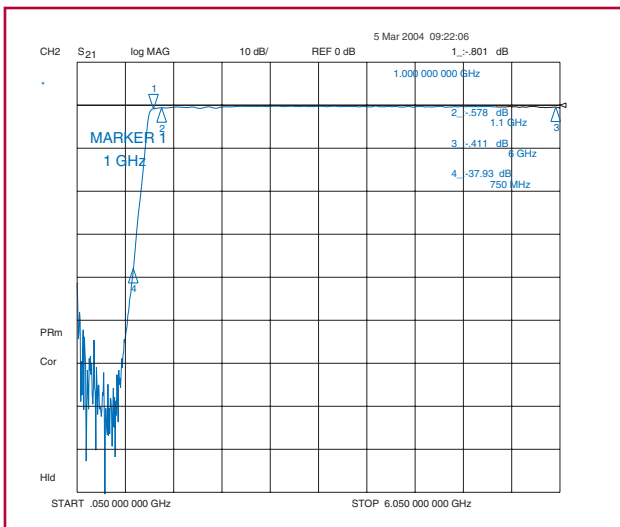

Amplitude

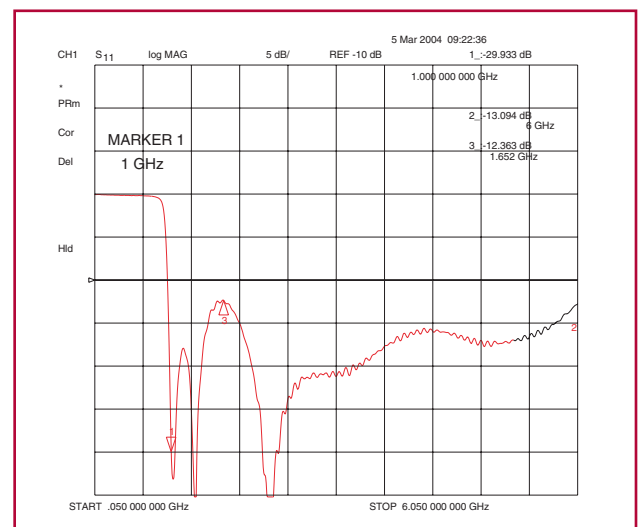

VSWR

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

