

# 7DL35-1960/NX60 Notch Filter

## ◆ Features:

- 6 mm Ceramic Resonator PCS Band Reject Filter
- Compact size: 1.75" x .58" x .27" Surface mount
- High "Q" low insertion loss vs. mechanical size




## ◆ Specifications:


Center Frequency:	1960 MHz
Passbands:	1000 - 1880 MHz 2005 - 2500 MHz
Passband loss:	3.0 dB max.
Passband return loss:	14 dB min.
30 dB Bandwidth:	60 MHz > 60 dB @ $f_0$
Operating temperature:	-40° - +85°C

## ◆ Applications:

- PCS and Wireless Production Testing

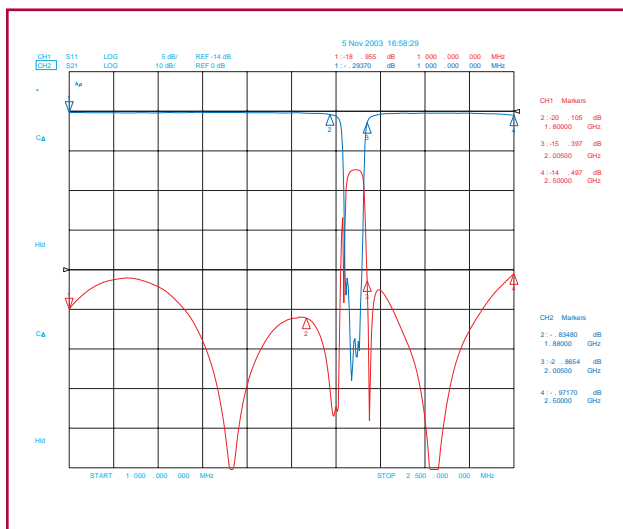

Amplitude

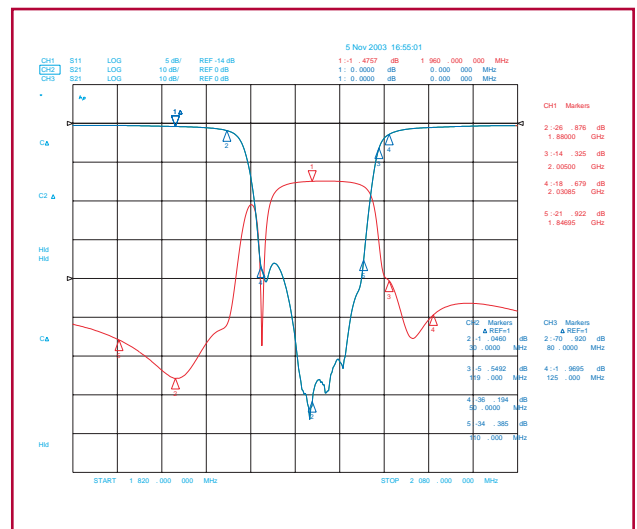

Return Loss

Filtering Solutions for Your Global Market

### USA

Phone: 410-749-2424  
FAX: 410-749-5725  
Email: sales@klmicrowave.com

### EUROPE

Phone: +44-(0)-1908-547920  
FAX: +44-(0)-1908-695284  
Email: sales@kleurope.com

Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)

